


#	DESCRIPTION	MATERIAL
1	OPERATING NUT	BRONZE
2	LUBRICATION PLUG	BRONZE
3	HOLD DOWN NUT	BRONZE
4	HOLD DOWN NUT O-RING	BUNA-N
5	BONNET / NOZZLE BOLT	ZINC PLATED STEEL
6	BONNET	CAST IRON, ASTM A126, CL. B
7	BONNET / NOZZLE NUT	ZINC PLATED STEEL
8	MAIN VALVE ROD	STEEL, C1117 HFS
9	NOZZLE SECTION UPPER	CAST IRON, ASTM A126, CL. B
10	NOZZLE / STANDPIPE BOLT	ZINC PLATED STEEL
11	STANDPIPE LUG	DUCTILE IRON, ASTM A536
12	NOZZLE / STANDPIPE NUT	ZINC PLATED STEEL
13	STANDPIPE / SHOE BOLT	304 SS
14	STANDPIPE / SHOE O-RING	BUNA-N
15	STANDPIPE / SHOE BOLT	304 SS
16	SEAT RING O-RINGS	BUNA-N
17	SEAT RING	BRONZE, C95500
18	MAIN VALVE TOP PLATE	BRONZE
19	MAIN VALVE BOTTOM PLATE	CAST IRON, ASTM A126, CL. B
20	MAIN VALVE	RUBBER
21	MAIN VALVE ACORN NUT	BRASS
22	STEM PIN	304 SS
23	SHOE	CAST IRON, ASTM A126, CL. B
24	DRAIN VALVE FACING	EPDM
25	DRAIN VALVE RIVET	STAINLESS STEEL
26	STANDPIPE LOWER FLANGE	DUCTILE IRON, ASTM A536
27	STANDPIPE PIPE	DUCTILE IRON, ASTM A536
28	STANDPIPE UPPER FLANGE	DUCTILE IRON, ASTM A536
29	NOZZLE / STANDPIPE O-RING	BUNA-N
30	NOZZLE O-RING	BUNA-N
31	NOZZLE BRASS	BRASS
32	NOZZLE CAP GASKET	RUBBER
33	NOZZLE CAP	CAST IRON, ASTM A126, CL. B
34	NOZZLE SET SCREW	304 SS
35	BONNET / UPPER O-RING	BUNA-N
36	OP NUT O-RING	BUNA-N

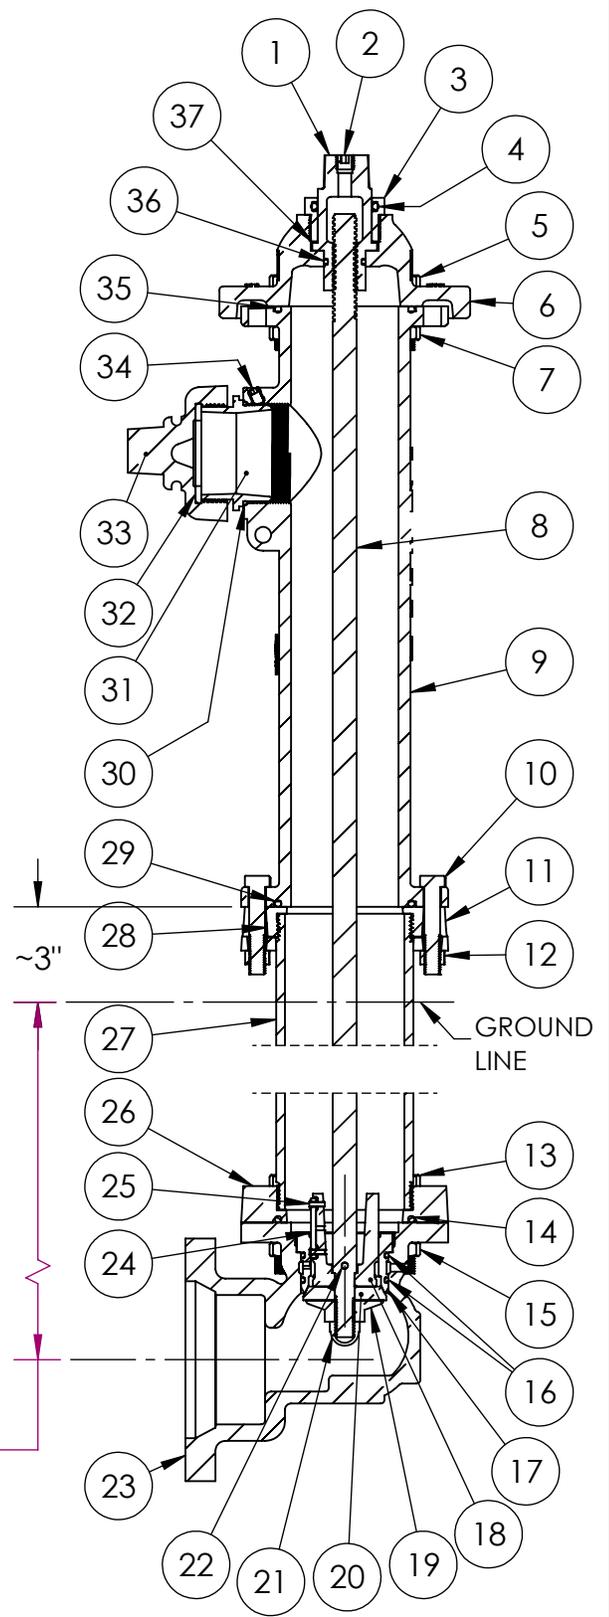

MEETS OR EXCEEDS AWWA C502

MAIN VALVE OPENING (MVO): 2.25"
7-8 TURNS TO OPEN/CLOSE

250 PSI WORKING PRESSURE
500 PSI HYDROSTATIC TEST PRESSURE

POST HYDRANT MODELS 0033: (1) 2.5" HOSE NOZZLE

BURY DEPTH
TO BE SPECIFIED
AT TIME OF ORDER

THIS DWG. AND ALL INFORMATION IS OUR PROPERTY AND SHALL NOT BE USED, COPIED, OR REPRODUCED WITHOUT WRITTEN CONSENT. DESIGN AND INVENTION RIGHTS RESERVED.

M&H VALVE COMPANY  A DIVISION OF McWANE INC. 605 WEST 23RD STREET ANNISTON, ALABAMA 36202	BY: CTJ DATE: 02/10/2026
	DWG: P4R2-11-N1-L11P18

M&H AWWA C502 POST HYDRANT
2 1/4" MODEL 0033 - 1.50" PENTAGON
STANDARD NOZZLE CAP - 3" MJ SHOE
ZINC PLATED STEEL ABOVE GROUND FASTENERS
304 SS BELOW GROUND FASTENERS