

- 1. FLOW MAY BE IN EITHER DIRECTION
- 2. VALVE SHAFT WILL MEET OR EXCEED AWWA C504 REQUIREMENTS
- 3. REFERENCE AWWA C504 FOR FLANGES AND DRILLING (ANSI 125)
- 4. 29 TURNS TO CLOSE
- 5. (6) 3/4" BOLTS ON MECH. JOINT
- 6. OPERATED BY 2" AWWA OPERATING / WRENCH NUT
- 7. RATED FOR 250PSI WORKING PRESSURE
- 8. GASKETS, GLANDS AND BOLTS FOR MECHANICAL JOINT FURNISHED WITH VALVE WHEN SPECIFIED ON ORDER

WRITTEN CONSENT. DESIGN AND INVENTION RIGHTS RESERVED.



M&H VALVE COMPANY


A DIVISION OF MCWANE INC. P.O. BOX 2088 ANNISTON, ALABAMA 36202 DRAWN: CM

DATE: 7/7/2021

DWG. NO.

BD08-M33-M1110-11110

8" AWWA C504 BUTTERFLY VALVE MECHANICAL JOINTS - RATED CL250 BURIED OPERATOR - OPEN LEFT FA12 OPERATOR FLANGE

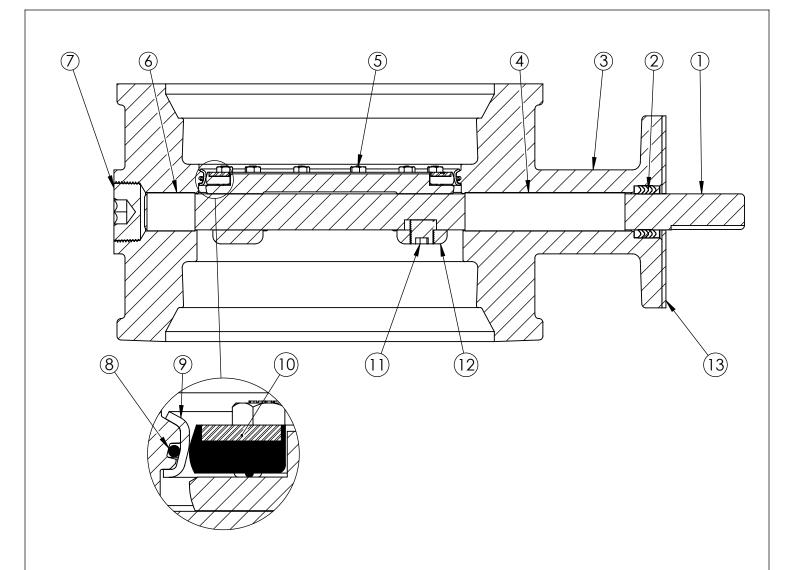

NOTES:

 (*) SEAL PLATE PROVIDED WITH ALL BARESTEM VALVES, AND USED WITH ALL PURCHASED OPERATORS

ITEM	DESCRIPTION	MATERIAL
1	OPERATOR SHAFT	630 STAINLESS STEEL, ASTM A-564
2	V-RING PACKING	EPDM & BUNA-N
3	BUTTERFLY VALVE BODY	DUCTILE IRON, ASTM A-536
4	UPPER JOURNAL BEARING	NYLATRON
5	VANE RING HEXHEAD CAP SCREWS	18-8 STAINLESS STEEL
6	LOWER JOURNAL BEARING	NYLATRON
7	BODY END PLUG	STEEL
8	BODY O-RING	EPDM
9	BODY SEAT RING	316 STAINLESS STEEL
10	VANE SEAT RING	EPDM W/ STAINLESS STEEL INSERT
11	VANE SHAFT TORGE PLUG	18-8 STAINLESS STEEL
12	VANE	DUCTILE IRON, ASTM A-536
13	SEAL PLATE *	STEEL

THIS DWG. AND ALL INFORMATION IS OUR PROPERTY AND SHALL NOT BE USED, COPIED, OR REPRODUCED WITHOUT WRITTEN CONSENT. DESIGN AND INVENTION RIGHTS RESERVED.



M&H VALVE COMPANY

A DIVISION OF MCWANE INC. P.O. BOX 2088 ANNISTON, ALABAMA 36202 DRAWN: CTJ
DATE: 10/15/2020
DWG. NO.
BB08-M33-B0000-11110

8" AWWA C504 BUTTERFLY VALVE MECHANICAL JOINTS - RATED CL250 BODY SUB-ASM MATERIAL LIST FA12 OPERATOR FLANGE